US ARMY RDECOM-ARDEC
MNET email: pica.rdar-eil-lt@conus.army.mil
PICATINNY ARSENAL, NJ
07806-5000

M67 Fragmentation Grenade
&
M228 Training Practice Fuze with M69 Training Practice Grenade
Confidence clip
Training and Familiarization

Munitions New Equipment Training and Media Production Branch (MNET)
COM 973.724.7338
DSN 312.880.7338
FAX 973.724.5089

Close Combat Munitions Analyst
[redacted]
Fire Power Branch
Soldier Requirements Division
706.545.6978

Terminal Learning Objective (TLO)

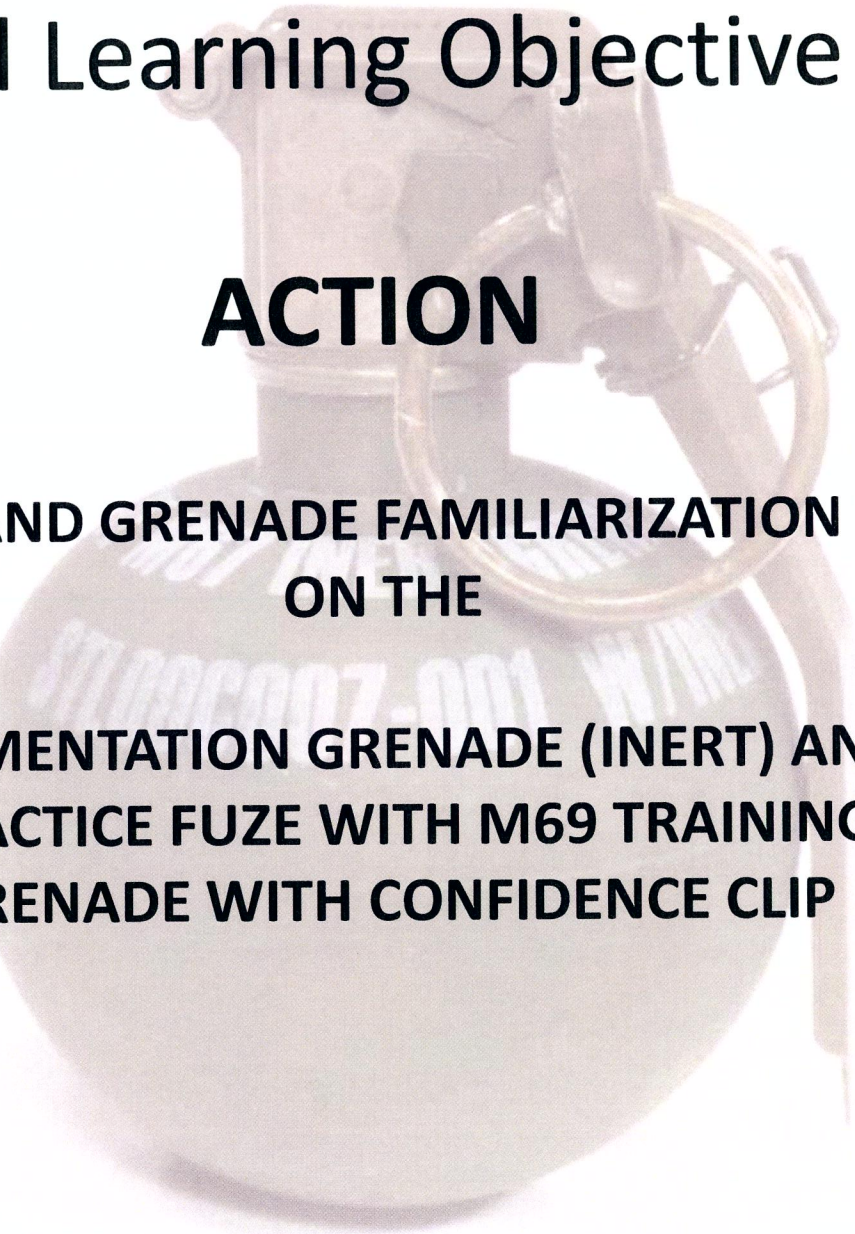

ACTION

CONDUCT HAND GRENADE FAMILIARIZATION TRAINING ON THE

M67 FRAGMENTATION GRENADE (INERT) AND M228 TRAINING PRACTICE FUZE WITH M69 TRAINING PRACTICE GRENADE WITH CONFIDENCE CLIP

CONDITION

IN A CLASSROOM AND OR FIELD ENVIRONMENT, GIVEN A POWERPOINT PRESENTATION ON THE MODIFIED ARMING PROCEDURE FOR THE M67 FRAGMENTATION GRENADE AND M228 TRAINING PRACTICE FUZE WITH CONFIDENCE CLIP. ONE EACH M67 FRAGMENATION GRENADE (INERT) OR ONE EACH M228 TRAINING PRACTICE FUZE (INERT) WITH M69 TRAINING PRACTICE GRENADE (INERT) PER SOLDIER TO CONDUCT HANDS ON TRAINING.

STANDARD

ARM THE M67 FRAGMENTATION GRENADE (INERT) OR M228 TRAINING PRACTICE FUZE (INERT) WITH CONFIDENCE CLIP USING THE MODIFIED ARMING PROCEDURES WITHOUT CAUSING DAMAGE TO THE HAND GRENADE FUZE, PULL RING-PIN ASSEMBLY, OR PERSONAL INJURY.

NOTE: There are no changes to the proper right or left hand grip, removing of the secondary/safety clip or the employment of the M67 fragmentation grenade or M69 Training practice grenade with M228 Training practice fuze with confidence clip.

SAFETY CONSIDERATIONS

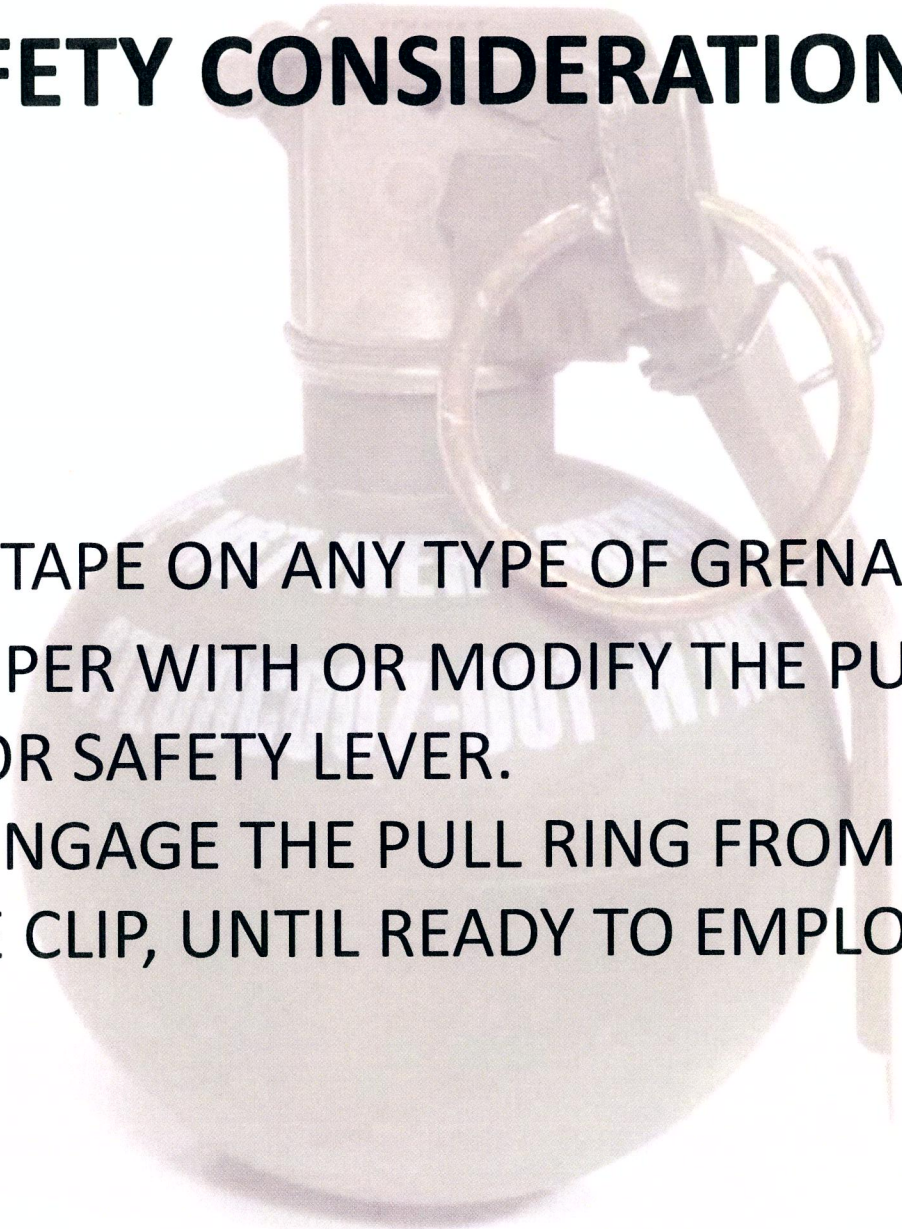

- DO NOT USE TAPE ON ANY TYPE OF GRENADE.
- DO NOT TAMPER WITH OR MODIFY THE PULL PIN, PULL RING, OR SAFETY LEVER.
- DO NOT DISENGAGE THE PULL RING FROM THE CONFIDENCE CLIP, UNTIL READY TO EMPLOY.

RISK ASSESSMENT

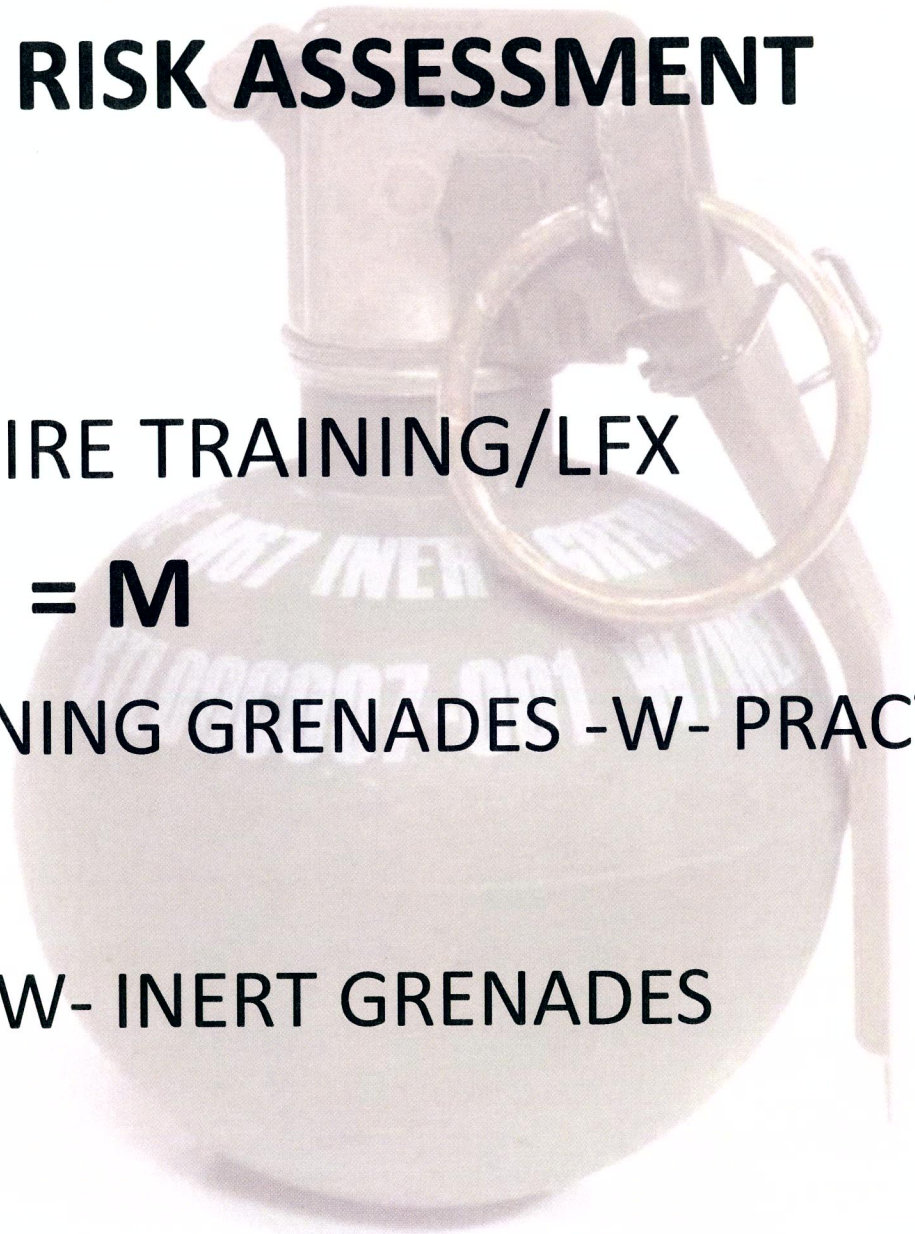

HIGH = H

FOR LIVE FIRE TRAINING/LFX

MEDIUM = M

M228 TRAINING GRENADES -W- PRACTICE FUZE

LOW = L

TRAINING -W- INERT GRENADES

ENVIRONMENTAL CONSIDERATIONS

IT IS THE RESPONSIBILITY OF ALL SOLDIERS AND DA CIVILIANS TO PROTECT THE ENVIRONMENT FROM DAMAGE. BASED ON ITS COMMITMENT TO ENVIRONMENTAL PROTECTION, THE ARMY WILL CONDUCT ITS OPERATIONS IN WAYS THAT MINIMIZE ENVIRONMENTAL IMPACTS. THE ARMY WILL COMPLY WITH ALL ENVIRONMENTAL LAWS AND REGULATIONS. THIS INCLUDES FEDERAL, STATE, LOCAL, AND HOST NATION LAWS, SOME OF WHICH ARE OUTLINED IN TC 3-34.489, THE SOLDIER AND THE ENVIRONMENT, 26 OCT 2001, APPENDIX B.

There are no unique environmental considerations for this period of instruction

EVALUATIONS

- SOLDIERS WILL BE EVALUATED ON THE MODIFIED ARMING PROCEDURE FOR THE M67 FRAGMENTATION GRENADE (INERT) AND THE M228 TRAINING PRACTICE FUZE WITH CONFIDENCE CLIP THROUGHOUT TRAINING.

- HAND GRENADE REINFORCEMENT TRAINING WILL BE CONDUCTED PRIOR TO ANY TYPE OF HAND GRENADE EMPLOYMENT TRAINING

ENABLING LEARNING OBJECTIVE (ELO)

Lesson #1

ACTION

CONDUCT HAND GRENADE FAMILIARIZATION ON THE

M67 FRAGMENTATION GRENADE (INERT) AND THE M228 TRAINING PRACTICE FUZE (INERT) WITH CONFIDENCE CLIP.

Pause/Click to watch the Video

Video Clip Link

or use the attachment clip in the lower right hand corner
to download the training files to a local drive

M67 Fragmentation Grenade **without Confidence Clip**

M67 Fragmentation Grenade **with Confidence Clip**

NOTE: The addition of the Confidence Clip is the ONLY change to the current M67 Fragmentation grenade

PROPER *RIGHT* HAND GRIP

1. Fuze skyward
   - Place safety lever between 1st and 2nd joint of the thumb of the throwing hand , wrap remaining fingers around grenade.
   - Secure a firm grip.
2. Remove Secondary/Safety Clip:
   - Remove secondary/safety clip with the thumb of the non-throwing hand
   - With the thumb of the non-throwing hand, Sweep the secondary/safety clip from throwing to non-throwing side.
   - Maintain a firm grip
3. Disengage confidence clip and arm grenade:
   - Palm of the non-throwing hand facing skyward
   - Insert the index or middle finger into the pull ring
   - Maintain a firm grip
   - Turn the pull ring in clockwise direction ¼ turn or until the pull ring separates from the confidence clip.
   - Pull the pull pin straight out of the grenade, ***immediately employ the grenade.***

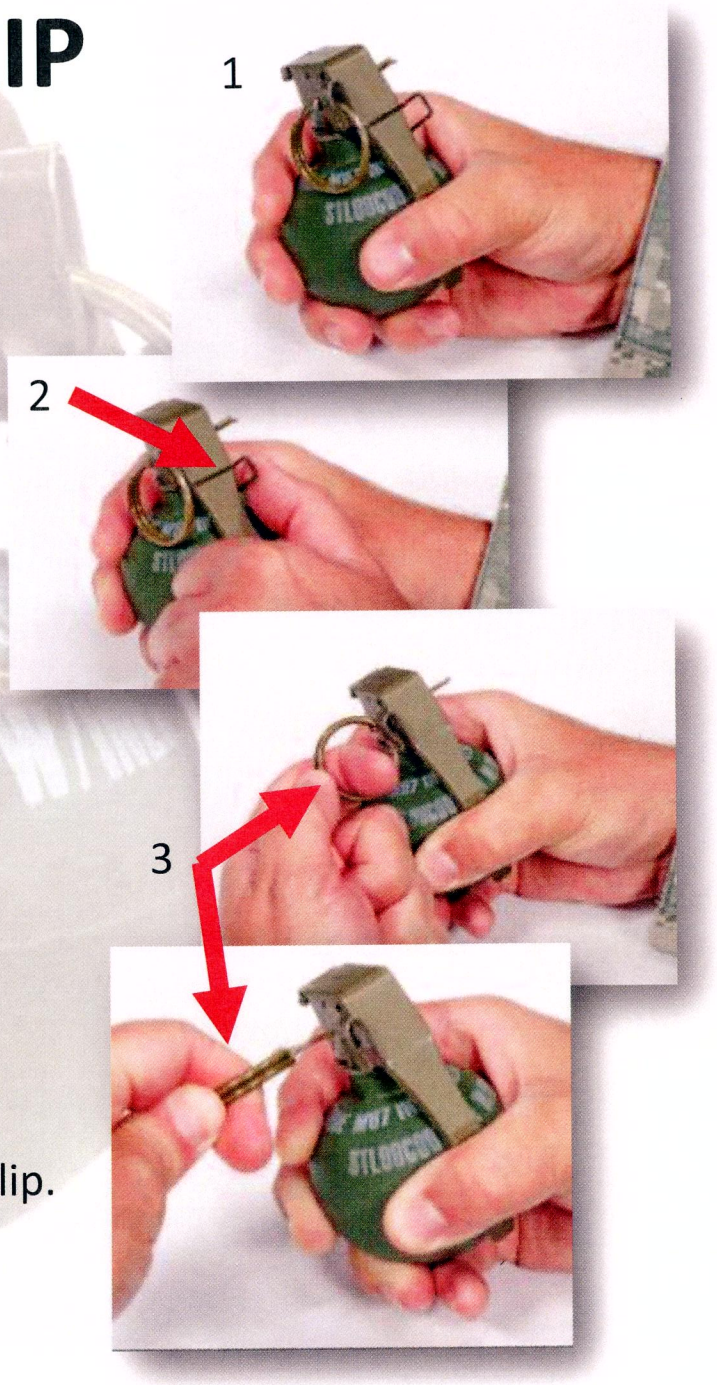

PROPER *LEFT* HAND GRIP

1. Fuze downward.
   - Place safety lever between 1st and 2nd joint of the thumb of the throwing hand, wrap remaining fingers around grenade.
   - Secure a firm grip.

2. Remove Secondary Safety Clip:
   - Remove secondary/safety clip with the thumb of the non-throwing hand.
   - With the thumb of the non-throwing hand, Sweep the secondary/safety clip from throwing to non-throwing side.
   - Maintain a firm grip.
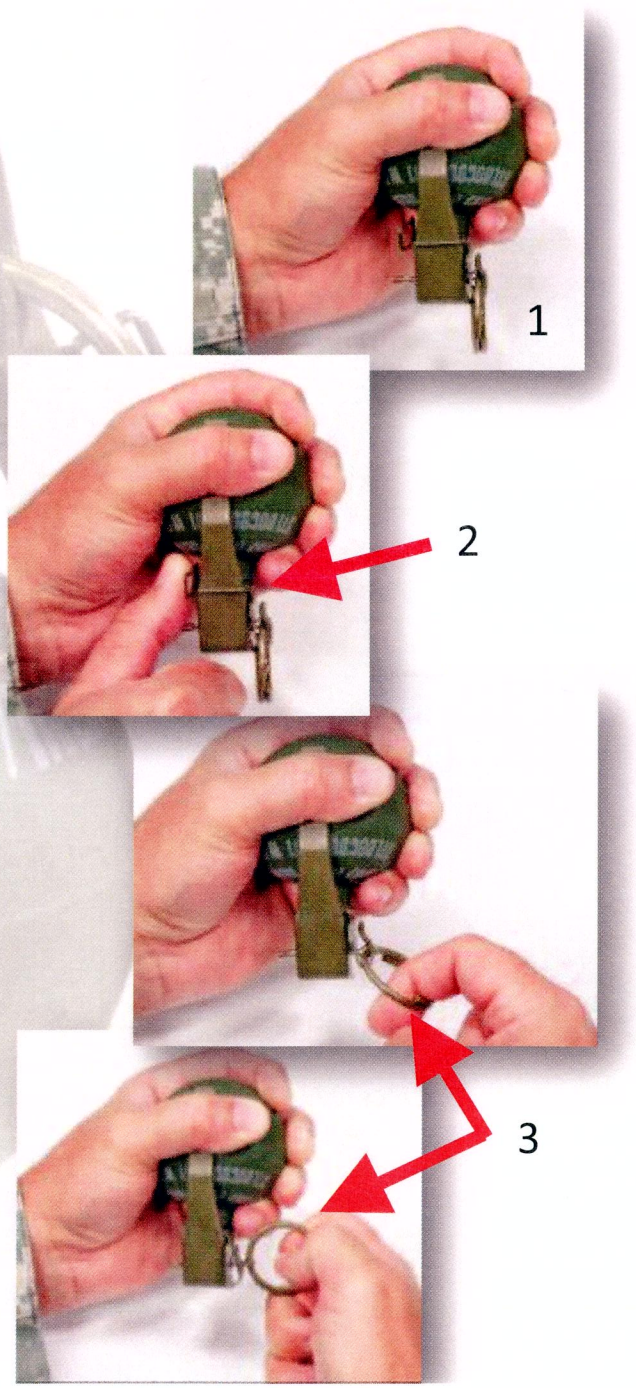
3. Disengage confidence clip and arm grenade:
   - Palm of the non-throwing hand facing downward.
   - Insert the index or middle finger into the pull ring.
   - Maintain a firm grip.
   - Turn the pull ring in clockwise direction ¼ turn or until the pull ring separates from the confidence clip.
   - Pull the pull pin straight out of the grenade, ***immediately employ the grenade.***